



Nominal Polysewer Pipe Diameter (Ømm)	Component A Polyethylene Pipe (Specification)	Component B D/S Pipe Adapter (Product Code)
150	Ø160mm PE SDR 26	PS689
225	Ø250mm PE SDR 26	PS1089
300	Ø315mm PE SDR 41	PS1289

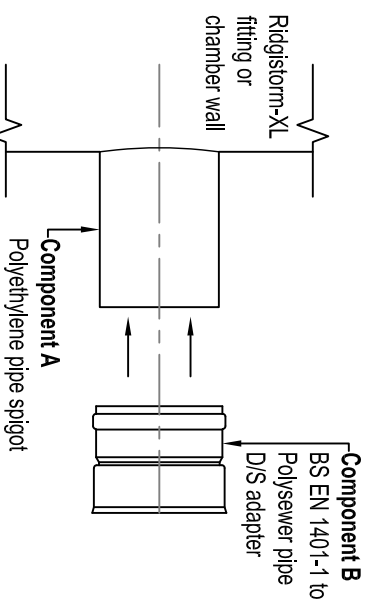

### ASSEMBLY SEQUENCE (ELEVATION)

Scale (1:20)

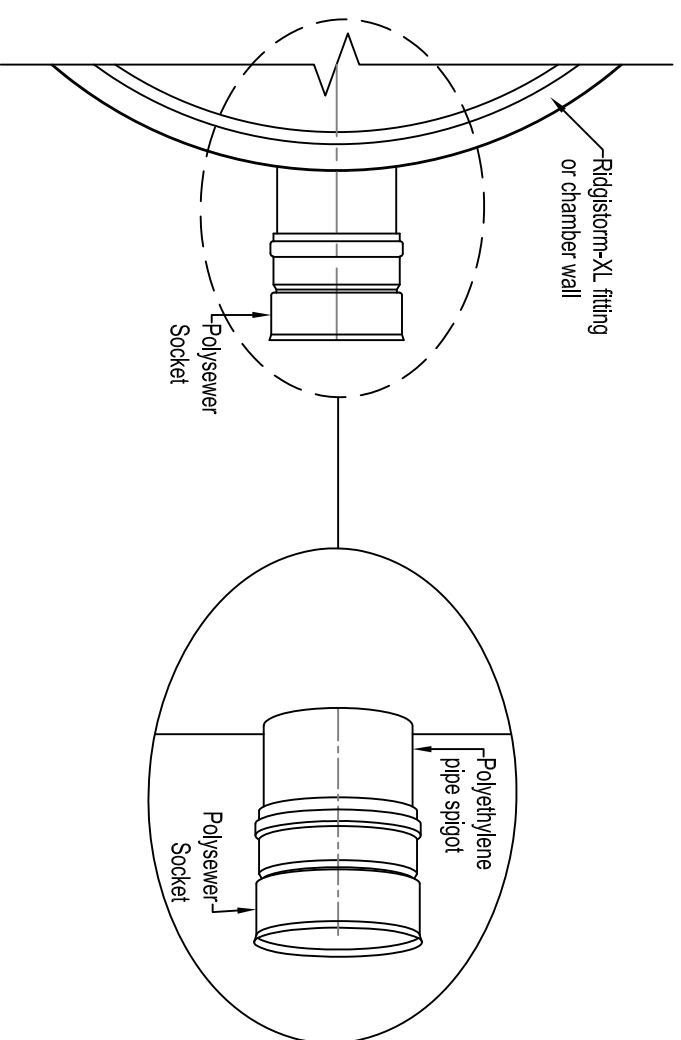


### PLAN

Scale (1:20)


Nominal Ridgisewer Pipe Diameter (Ømm)	Component A Polyethylene Pipe (Specification)	Component B Flex-seal Component
400	Ø450mm PE SDR 17	Please contact Flex-seal for appropriate coupler
450	Ø500mm PE SDR 17	
500	Ø560mm PE SDR 17	
600	Ø630mm PE SDR 33	

Note: The above table details typical Flex-seal coupling adapters used; alternatives are available. All proposed coupling systems should be confirmed as acceptable with the overseeing engineer prior to commencement of construction activities.

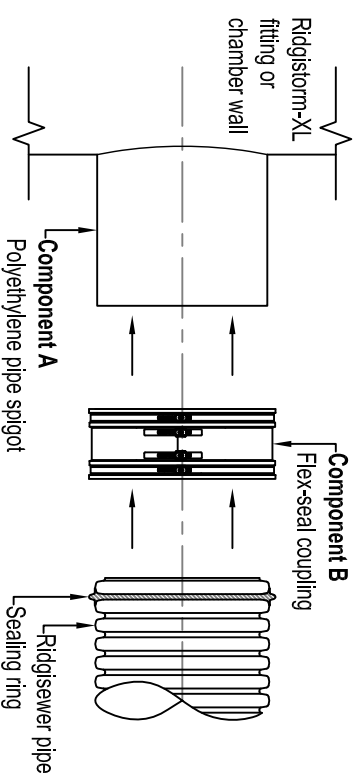

### ASSEMBLY SEQUENCE (ELEVATION)

Scale (1:20)

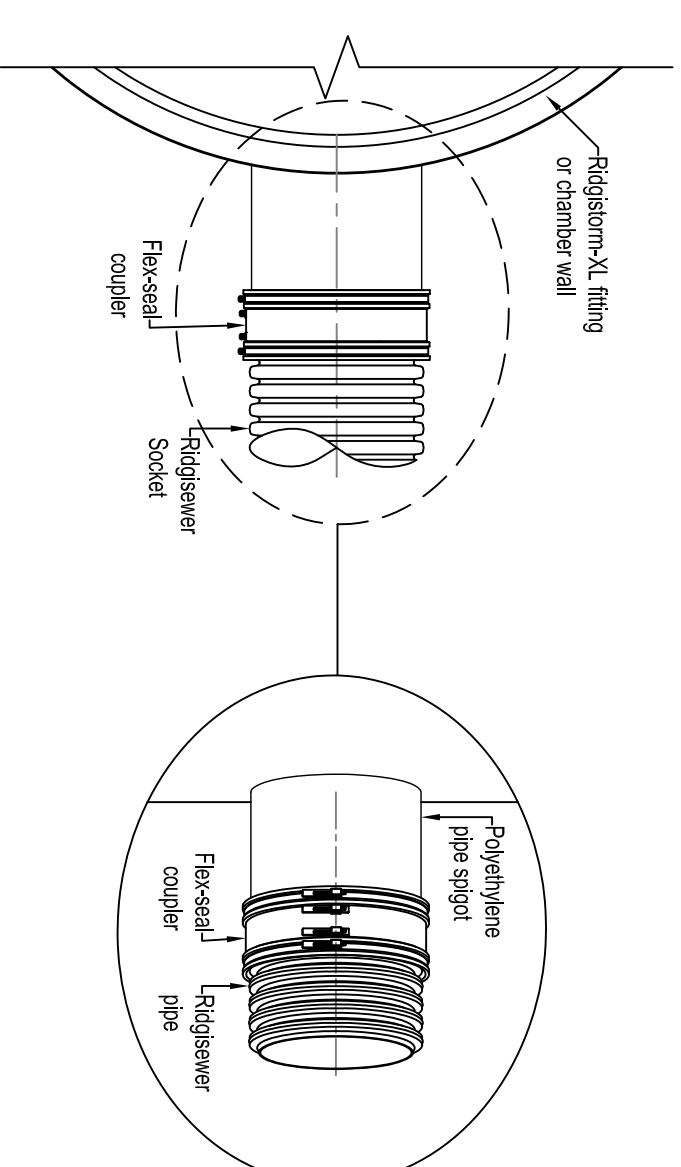

### PLAN

Scale (1:20)



**Polypipe** Civils

Charmwood Business Park,  
North Road, Loughborough,  
Leicestershire, LE11 1LE

Tel: 01509 615100  
Fax: 01509 615215  
www.polypipe.com/civils  
www.polypipe.com/wms

PROJECT

**RIDGISTORM-XL STANDARD DETAILS**

STATUS  
**FOR INFORMATION**

DATE  
23/06/17

DRAWN BY  
JL

TITLE

**TYPICAL SEWER STUB CONNECTIONS**

ORIGINAL SIZE  
A3

SCALE  
AS SHOWN

DRAWING NO.  
RST\_SD\_ST\_001

### NOTES

- All dimensions in millimetres, unless otherwise stated.
- All dimensions are nominal and may vary within manufacturing or construction tolerances.
- All site temporary and enabling works by others.
- Ridgistorm-XL units to be installed in accordance with Polypipe Civils recommendations (refer to Polypipe technical guidance for further information); giving due consideration to the requirements of the organisation who will be taking ultimate ownership of the installation.
- Dimensions are based on a minimum stiffness class SN2 pipe; corresponding to the standardised pipe profiles current at the time of this drawing's issue.
- This drawing is intended for guidance only. Confirmation of the information contained within this document should be sought from the consulting engineers before final design or construction activities commence.
- Unless otherwise stated, all Ridgistorm-XL is supplied to site without direct means of lifting incorporated. The lift supervisor must assess and plan the lift, in the circumstances of the lift, and provide slings and/or other controls as deemed necessary to ensure a safe lift.
- Minimum and maximum cover depths applicable, dictated by the expected native ground conditions, trafficking and proposed Ridgistorm-XL pipe specification.

The information in this document is of an illustrative nature and is supplied by Polypipe Civils without charge. This document does not form the whole or any part of a contract or intended contract with the user. The information within this document should not be solely relied upon to determine the suitability or installation requirements of our products for a proposed application and expected site conditions; expert advice should be sought in this respect. Final determination of the suitability of any information or material for the use contemplated and the manner of use is the sole responsibility of the user and the user must assume all risk and liability in connection therewith. Further information with regard to liabilities may be found at [www.polypipe.com/disclaimer](http://www.polypipe.com/disclaimer).